



Truck-mounted concrete pump

SY67 RZ6-200

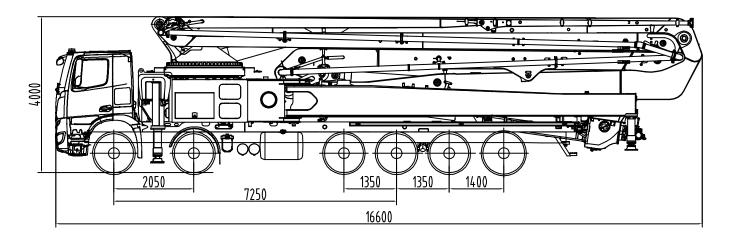

Note: Standard version. Dimensions and weights depend on truck, pump model and equipment. For illustration only.

Technical data			
Boom	Folding system	6-arm RZ	
	Vertical reach	66.2 m	
	Horizontal reach	61.1 m	
	Reach depth	44.5 m	
	Unfolding height	17.1 m	
	End hose length	3 m	
Cummont	Outrigger spread front	12.4 m	
Support	Outrigger spread rear	15.1 m	
Dimensions	Overall length	16.6 m	
	Width	2.55 m	
	Height	4.0 m	
Core pump	Output	160 m³/h	
	Pressure	85 bar	
	Strokes/min	26	
	Delivery cylinder Ø	260 mm	
	Stroke length	1900 mm	

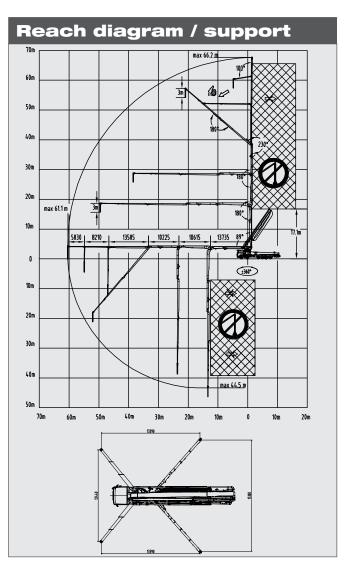

Standa	rd Equipment SY67 RZ6-200	
Chassis	Transfer Gear Box	
	Towing eye	
Cleaning	Water tank 600 I	
	Water pump 150 l/min 20 bar	
Delivery line	2-layer delivery line – DN 125, 5.5"	
	End hose 3 m DN 125, 5.5"	
Hopper	Concrete hopper with agitator	
	Central lubrication hopper, hydraulically	
	Hard metal wear parts kit	
	Switchover cylinder diameter = 100 mm	
	Agitator safety switch off, lever switch	
Lighting	Working light for illuminating hopper	
	Side marker lamps	
Pump	Core pump with 1900 mm stroke	
	Delivery cylinder with 260 mm diameter	
	Core pump with 160 m³/h delivery rate	
	Delivery cylinder chrome-plated	
	Delivery piston standard	
Control System	SANY SYLD user interface display	
	SANY SYMC control system	
	Radio remote control propotional	
	2nd radio remote control incl. 40 m cable	
Support	Boom pedestal (X-type outrigger and swing out legs)	
	OSS one side support (assistance device)	
	Support plates (4x) in magazine (2x) open	

Safety	Chassis horn via remote control on hopper	
	Handrail on rearsteps	
	Horn at the boom, button on rear controlbox	
	Warning device boom not in cradle	
Addi- tional features	User manual and spare part list	
	Stowage Box	
	Painting: pedestal and hopper in RAL 9016 Traffic white	
	Painting: arm assembly and delivery line in RAL 9016 Traffic white	
EU KIT	Support Stability Control (safety system)	
	CE Certification & Documentation	
	EU road approval KIT (markers & underrun protection)	
	Platform aluminum	
	Rear steps, left & right side	
	Plastic hopper cover, foldable	
	Vibrator on hopper grid radio remote/on site controlled	

Available Options End hose with squeezing valve "drop stop" High Pressure Cleaner

Customer Painting in two colors (TIER 2)

See quotation for exact serial delivery scope.

Swivel support plates

Materials and specifications are subject to change without further notice in accordance with our continuous technical innovations. Photos and illustrations may include additional equipment.

All rights reserved. 2207

Putzmeister Concrete Pumps GmbH

Max-Eyth-Straße 10 · 72631 Aichtal, Germany P.O.Box 2152 · 72629 Aichtal Tel. +49 (7127) 599-0 · Fax +49 (7127) 599-520 pmw@putzmeister.com · www.putzmeister.com