



Stationary concrete pump

BSA 1005 D5 BSA 1005 E

Output up to 52 m³/h Delivery pressure up to 70 bar

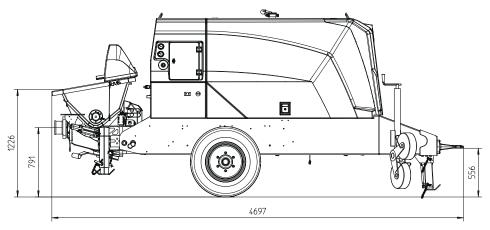



Dimensions and weights depend on equipment. Subject to technical modifications and errors.

Technical data

Model		BSA 1005 D5 BSA 1005 E		
Material number		102682.000	102683.000	
Output	m³/h	52	47	
Delivery pressure	bar	70		
Delivery cylinder	Ø mm	180		
Delivery cyl. stroke	mm	1000		
Strokes / minute		33	31	
Engine / motor power	kW	55.4	45	
Hopper		RS 488		
Capacity	I	approx. 300		
Filling height	m	1.23		
Transfer tube		S 1812		
Line connection	mm	SK 125		
Pressure connection	ш	5.5		
Control system		Ergonic 3.0		
Diesel tank	1	120	_	
Weight	kg	2900	3100	

Serial equipment

Agitator safety switch off	
Cable remote control 10 m	
Central lubrication on hopper with grease gun	
Chassis F8	_
Cleaning accessories	
Coloring: Pump, frame, roof anthracite-grey Doors chrome yellow	
Concrete hopper with agitator	_
Drawbar eye (DIN)	
Drive diesel, Deutz 55.4 kW, Stage (1005 D5)	5
Drive electric, 45 kW, iE03 (1005 E)	
Electronic error management	
Ergonic Graphic Display	
	_

Flushing water pump 50 I/min 20 ba	
Grill 60 mm	
Operating manuals (1× paper, 1× CD-ROM) spare part list	
Output adjustment, electrical	
Outriggers 3× mech.	
Speed drawdown automatically on pump stop (Diesel driven only)	
Splash guard	
Support wheel	
Tool set incl. standard equipment	

All data maximum theoretical

See quotation for exact serial delivery scope. Comprehensive range of options available on request.

Putzmeister Concrete Pumps GmbH | P.O. Box 2152 | 72629 Aichtal | Tel. +49 7127 599-0 | Fax +49 7127 599-520 | pmw@putzmeister.com Right to make amendments reserved | © by Putzmeister | All rights reserved | Printed in Germany | 2002