


Concrete pump on crawler chassis

BSC 1005 D5
BSC 1006 D5

Output up to 64 m³/h
Delivery pressure up to 70 bar

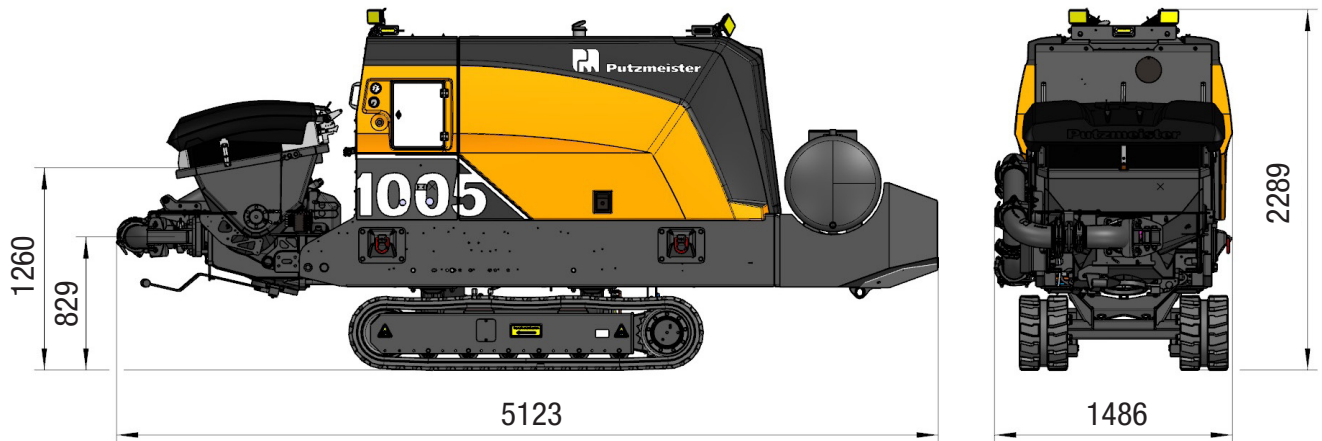

Dimensions and weights depend on equipment. Subject to technical modifications and errors.

Technical data

Model		BSC 1005 D5	BSC 1006 D5
Material number		102991.000	103050.000
Output	m ³ /h	52	64
Delivery pressure	bar	70	55
Delivery cylinder	Ø mm	180	
Delivery cyl. stroke	mm	1000	
Strokes / minute		33	42
Engine / motor power	kW	55.4	55.4
Hopper		RS 488	
Capacity	l	approx. 300	
Filling height	m	1.26	
Transfer tube		S 1812	
Line connection	mm	SK 125	
Pressure connection	"	5.5	
Control system		Ergonic 3 PS	
Diesel tank	l	120	
Weight	kg	4100	4000

Serial equipment

Agitator safety switch off	Flushing water pump 50 l/min 20 bar
Central lubrication on hopper with grease gun	Grill 60 mm
Cleaning accessories	Operating manuals (1× paper, 1× CD-ROM) spare part list
Coloring: Pump, frame, roof anthracite-grey Doors chrome yellow	Opto-acoustic warning in driving mode
Concrete hopper with agitator	Output adjustment, electrical
Crawler, rubber tracks	Radio remote control with display
Drive diesel, Deutz 55.4 kW, EU-StageV	Speed drawdown automatically on pump stop
Electronic error management	Splash guard
Ergonic Graphic Display	Tool set incl. standard equipment

Available options (exerpts)

Compressor with air tank	Watertank 300 liters
--------------------------	----------------------

All data maximum theoretical